



DiskStation DS716+II

Fulfill your needs for safe data storage and ultra high definition video sharing with Synology DiskStation DS716+II. Compact yet powerful, DS716+II features an Intel® quad-core CPU with AES-NI hardware encryption engine and 2GB RAM, providing outstanding performance and data encryption acceleration along with real-time transcoding of 4K Ultra HD source content. Synology DiskStation DS716+II is backed with Synology's 3-year limited warranty.

Highlights

- **Quad-core CPU with AES-NI hardware encryption engine**
- **Encryption performance at over 226.09 MB/s reading, 138.04 MB/s writing¹**
- **Scale up to 7 drives with Synology DX513²**
- **Advanced snapshot technology for data protection**
- **Introduced Btrfs file system with built-in data integrity check**
- **Single H.264/H.265 4K or triple Full HD video transcoding on the fly³**
- **Dual 1GbE LAN with failover and Link Aggregation support**
- **A versatile storage server for small offices**

Compact Storage Server with Outstanding Performance


Synology DiskStation DS716+II is designed for small offices pursuing a compact yet powerful shared storage solution, featuring an **Intel® Celeron® quad-core CPU**, built-in **AES-NI hardware encryption engine**, **2GB DDR3 RAM**, and storage scalability up to 7 drives with Synology Expansion Unit DX513². With Link Aggregation enabled, DS716+II delivers up to an average **226.1 MB/s reading** and **141.19 MB/s writing** speed under RAID 1 configuration in a Windows® environment, and an encrypted data transmission at over **226.09 MB/s reading** and **138.04 MB/s writing**.¹

DS716+II comes with **3 USB 3.0 ports** both on the front and rear panel, providing fast and convenient data transfer and backup to external storage devices. **Dual Gigabit LAN** with failover support and hot-swappable drive tray design ensure continual service uptime during drive replacement or unexpected LAN failure. **High Availability Manager** ensures seamless transition between clustered servers in the event of server failure with minimal impact to applications to decrease the risk of unexpected interruptions and costly downtime.

Btrfs: Next Generation Storage Efficiency


DS716+II introduces the **Btrfs file system**, bringing the most advanced storage technologies to meet the management needs of modern businesses:

- **Built-in data integrity check** detects data and file system corruption with data and meta-data checksums and improve overall stability.
- **Flexible Shared Folder/User Quota System** provides comprehensive quota control on all user accounts and shared folders.
- **Advanced snapshot technology** with customizable backup schedule allows up to **1024 copies** of shared folder backups in a minimum **5-minute interval** without occupying huge storage capacity and system resources.
- **File or folder level data restoration** brings huge convenience and saves time for users who wish to restore only a specific single file or folder.
- **Cloud Station with file versioning** reduces down to half of storage consumption when compared with the Ext4 file system.

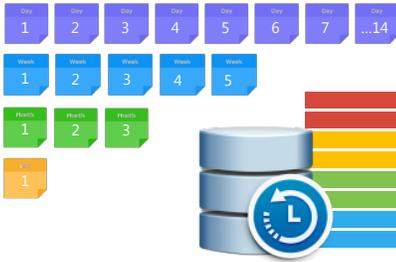

Next Generation Storage Efficiency

The Btrfs file system brings storage management to the next level by providing more efficient storage utilization, scheduled shared folder snapshot, and file/folder-level data restoration.

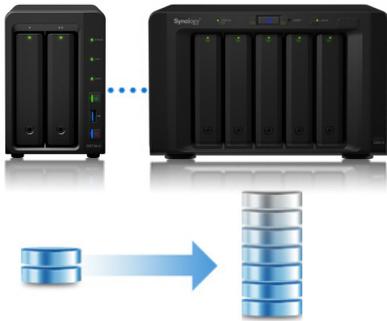

Flexible Scalability

DS716+II can expand its capacity on-the-fly and enlarge volumes across its expansion unit for storage or backup.

Comprehensive Business Applications

Powered by the innovative Synology DiskStation Manager (DSM), DS716+II comes fully-equipped with business applications and features:

- Easy integration with existing business network environments through **Windows® AD** and **LDAP** directory services without recreating user accounts.
- **Windows ACL** support provides fine-grained access control and efficient privilege settings, allowing DS716+II to fit seamlessly into current infrastructure.
- Complete backup applications protect information assets by regularly backing up files and iSCSI LUNs locally and remotely.

4K Ultra HD Multimedia Bank

Synology DiskStation DS716+II features real-time H.264/H.265 **1-channel 4K Ultra HD** or **3-channel Full HD³** video transcoding, bringing more complete support to the latest multimedia file formats and contents and allowing easy file sharing across Windows, Mac®, and Linux® platforms. With **Video Station**, you can organize personal digital video library with comprehensive media information, watch 4K Ultra HD movies and films, or record TV programs with a DVB-T/DVB-S stick. **Photo Station**'s intuitive design allows you to effortlessly organize photos into customized categories, smart albums and blog posts, and link them to social networking websites within a few clicks. **Audio Station** comes with Internet radio and lossless audio formats support and provides music playback via DLNA, AirPlay®, and Bluetooth devices (a Bluetooth dongle is required).

Virtualization Ready


With iSCSI support in DSM, DS716+II provides seamless storage solutions for virtualization environments, including VMware®, Citrix®, and Hyper-V®. With VMware vSphere 5 and VAAI integration, DS716+II helps offload specific storage operations and optimizes computation power for unparalleled performance and efficiency in VMware environments. It is the ideal alternative to SAN solution for businesses. Affordable and cost-effective, iSCSI allows SMB users to consolidate storage into data center storage arrays while providing hosts with the illusion of locally-attached disks.

Energy Efficient and Easy Management Design

Synology DS716+II is designed and developed with energy efficiency in mind. Compared with the average storage server counterparts, DS716+II consumes only 19.14W in regular operation. The support of Wake on LAN/WAN and scheduled power on and off can further reduce power consumption and operation cost. HDD hibernation can be configured to take effect automatically when the system has been inactive for a specified period of time. This not only saves energy but also extends the lifespan of the hard disks.

All Synology products are produced with RoHS compliant parts and packed with recyclable packing materials. Synology acknowledges the responsibility as a global citizen to continually work to reduce the environmental impact of every product produced.

Connections & Buttons

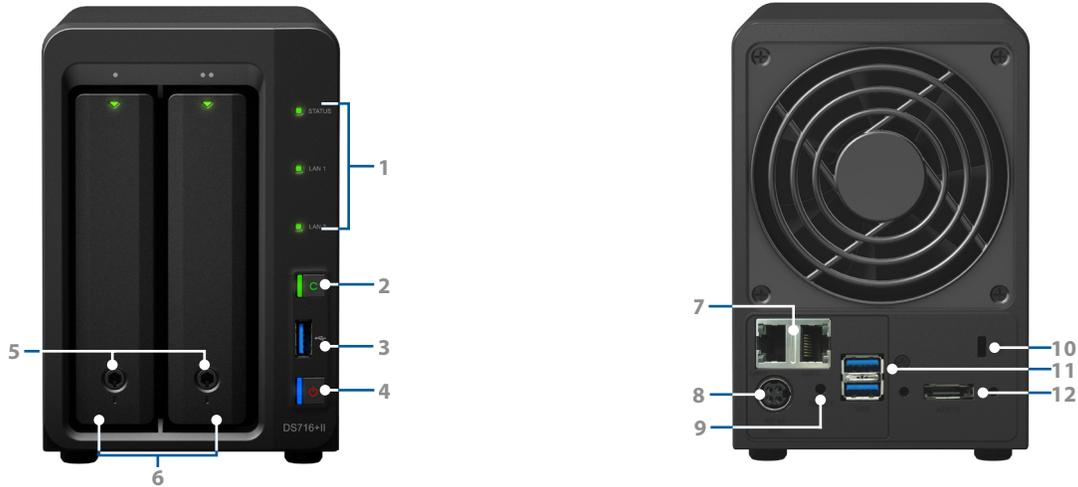

| | | | | | | | |
|---|---------------|----|--------------------------|----|--------------------------|----|--------------|
| 1 | LED indicator | 2 | USB copy button | 3 | USB 3.0 port | 4 | Power button |
| 5 | Tray lock | 6 | Drive tray | 7 | Gigabit (RJ-45) LAN port | 8 | Power port |
| 9 | Reset button | 10 | Kensington Security Slot | 11 | USB 3.0 port | 12 | eSATA port |

Technical Specifications

Hardware

| | |
|-------------------------------|--|
| CPU | Intel Celeron N3160 quad-core 1.6GHz, burst up to 2.24GHz |
| Floating point unit | Yes |
| Hardware encryption engine | Yes (AES-NI) |
| Hardware transcoding engine | Supported codec: H.264 (AVC), H.265 (HEVC), MPEG-2 and VC-1; maximum resolution: 4K (4096 x 2160); maximum frame rate per second (FPS): 30 |
| RAM size | DDR3 2GB |
| Compatible drive type | 3.5"/2.5" SATA III/II x 2 (hard drives not included) |
| Maximum internal raw capacity | 20TB (10TB HDD x 2) (actual capacity dependent on volume types) |
| External ports | USB 3.0 port x 3, eSATA port x 1 |
| Size (HxWxD) | 157 mm x 103.5 mm x 232 mm |
| Weight | 1.75 kg |
| LAN | Gigabit (RJ-45) x 2 |
| Wireless support | Yes (wireless dongles not included) |
| Wake on LAN/WAN | Yes |
| Scheduled power on/off | Yes |
| AC input power voltage | 100V to 240V |
| Power frequency | 50Hz to 60Hz, single phase |
| Operating temperature | 5°C to 40°C (40°F to 104°F) |
| Storage temperature | -20°C to 60°C (-5°F to 140°F) |
| Relative humidity | 5% to 95% RH |

General

| | |
|-------------------------|---|
| Networking protocols | CIFS, AFP, NFS, FTP, WebDAV, CalDAV, iSCSI, Telnet, SSH, SNMP, VPN (PPTP, OpenVPN™, L2TP) |
| File system | Internal: Btrfs, ext4 External: Btrfs, ext4, ext3, FAT, NTFS, HFS+ |
| Storage management | Maximum single volume size: 108TB, Maximum internal volume: 512, Maximum iSCSI Target: 32, Maximum iSCSI LUN: 256, iSCSI LUN clone/snapshot support; SSD read/write cache support |
| Supported RAID type | Synology Hybrid RAID (SHR), Basic, JBOD, RAID 0, RAID 1; with Synology Expansion Unit DX513/DX213: RAID 5, RAID 6, RAID 10 |
| File sharing capability | Maximum user account: 2048, Maximum group: 256, Maximum shared folder: 512, Maximum concurrent CIFS/AFP/FTP/File Station connection: 512 |
| Privilege | Windows Access Control List (ACL) |
| Directory service | Windows AD Integration: Domain Users login via Samba (CIFS)/AFP/FTP/File Station, LDAP integration |
| Virtualization | VMware vSphere 5, Microsoft Hyper-V, Citrix ready |
| Security | FTP over SSL/TLS, IP auto-block, firewall, encrypted network backup over Rsync, HTTPS connection |

| | |
|--------------------|---|
| Utilities | Synology Web Assistant, Cloud Station Drive, Cloud Station Backup, Cloud Sync Decryption Tool, Evidence Integrity Authenticator, Photo Station Uploader, Snapshot Manager for VMware, Snapshot Manager for Windows, NFS Plug-in for VMware VAAI |
| Supported clients | Windows 7 onwards and Mac OS X® 10.10 onwards |
| Supported browsers | Chrome™, Firefox®, Internet Explorer® 8 onwards, Safari® 7 onwards, Safari (iOS® 7 onwards on iPad®), Chrome (Android 4.0 onwards on tablets) |
| Language | English, Deutsch, Français, Italiano, Español, Dansk, Norsk, Svensk, Nederlands, Русский, Polski, Magyar, Português do Brasil, Português Europeu, Türkçe, Český, 日本語, 한국어, 繁體中文, 简体中文 |

Applications

| | |
|-----------------------------|---|
| File Station | Virtual drive, remote folder, Windows ACL editor, compress/extract archived files, bandwidth control for specific users or groups, create sharing links, transfer logs |
| Backup solutions | Network backup; local backup; desktop backup; configuration backup; OS X Time Machine; backup data to public cloud; shared folder sync - maximum task number: 8 |
| FTP Server | Bandwidth control for TCP connections, custom FTP passive port range, anonymous FTP, FTP SSL/TLS and SFTP protocols, boot over the network with TFTP and PXE support, transfer logs |
| High Availability Manager | Combines two DS716+II into one high-availability cluster |
| Printer Server | Maximum printer: 2, printing protocols: LPR, CIFS, IPP, iOS printing, Google Cloud Print™, multi functional print server (MFP functions are for Windows PC only) |
| Security Advisor | Malware detection/removal, user account/password, network, system-related security scan |
| iOS/Android™ applications | DS cloud, DS file, DS finder, DS cam, DS note, DS audio, DS download, DS photo, DS video |
| Windows Phone® applications | DS file, DS finder, DS audio, DS download, DS photo, DS video |

Add-on Packages

| | |
|-------------------------|---|
| Antivirus Essential | Full system scan, scheduled scan, white list customization, virus definition auto update |
| Cloud Station Server | Maximum concurrent file transfers: 512, retain historical and deleted file versions |
| Cloud Sync | One or two-way synchronization with public cloud storage providers including Amazon Cloud Drive, Amazon S3-compatible storage, Baiduyun, Box, Dropbox, Google Cloud Storage, Google Drive, hubiC, MegaFon Disk, Microsoft OneDrive, OpenStack Swift-compatible storage, WebDAV servers, Yandex Disk |
| DLNA/UPnP® Media Server | DLNA certified, PS3®/PS4®/Xbox 360®/Xbox One® support |
| Download Station | Supported download protocols: BT/HTTP/FTP/NZB/eMule Maximum concurrent download task: 80 |
| Log Center | SSL connection, log rotation: 6 months, 1 year, 2 years, 3 years, email notification |
| MailPlus | Intuitive webmail interface for MailPlus Server; customizable mail labels, filters and user interface |
| MailPlus Server | Secure, reliable, and private mail server solution with High-availability, load balancing, security and filtering design (Including free MailPlus licenses for 5 mail accounts. Procurement of additional licenses is required.) |
| Note Station | Rich-text note organization with versioning, encryption, sharing, media embedding and attachments |
| Storage Analyzer | Volume and quota usage, total size of files, volume usage and trends based on past usage, size of shared folders, largest/most/least frequently modified files |
| Surveillance Station | Maximum IP camera: 40 (total of 1200 FPS at 720p, H.264) (Including two free camera licenses. Procurement of additional licenses is required.) |
| VPN Server | Maximum connections: 20; supported VPN protocols: PPTP, OpenVPN™, L2TP |
| Web Station | Virtual host (up to 30 websites), PHP/MariaDB®, 3rd-party applications support |
| Other packages | Photo Station, Audio Station, iTunes® Server, 3rd-party packages |

Environment and Packaging

| | |
|----------------------|---|
| Environment | RoHS Compliant |
| Package content | DS716+II main unit, Welcome note, accessory pack, AC power adapter, RJ-45 LAN cable x 2 |
| Optional accessories | Camera License Pack, VS360HD, Synology Expansion Unit DX513/DX213 |
| Warranty | 3 Years |

*Model specifications are subject to change without notice. Please refer to www.synology.com for the latest information.

1. Performance figures may vary depending on environment, usage and configuration.
2. DS716+II supports one Synology Expansion Unit DX513/DX213, sold separately.
3. DS716+II can transcode 4K video to 1080p or lower. The concurrent channels of Full HD video transcoding may vary depending on the video codec, resolution, bitrate and FPS.

SYNOLOGY INC.

Synology is dedicated to taking full advantage of the latest technologies to bring businesses and home users reliable and affordable ways to centralize data storage, simplify data backup, share and sync files across different platforms, and access data on-the-go. Synology aims to deliver products with forward-thinking features and the best in class customer services.

Copyright© 2016, Synology Inc. All rights reserved. Synology, the Synology logo are trademarks or registered trademarks of Synology Inc. Other product and company names mentioned herein may be trademarks of their respective companies. Synology may make changes to specification and product descriptions at anytime, without notice. Printed in Taiwan.

DS716+II-2016-ENU-REV002

Headquarters

Synology Inc. 3F-3, No. 106, Chang An W. Rd., Taipei, Taiwan Tel: +886 2 2552 1814 Fax: +886 2 2552 1824

China

Synology Shanghai
20070, Room 516, No. 638
Hengfeng Rd., Zhabei Dist.
Shanghai, China

France

Synology France SARL
39 rue Louis Blanc
92400 Courbevoie, France
Tel: +33 147 176288

North & South America

Synology America Corp.
3535 Factoria Blvd SE #200
Bellevue, WA 98006, USA
Tel: +1 425 818 1587

United Kingdom

Synology UK Ltd.
Unit C, Denbigh West Business Park
Third Avenue, Bletchley
Milton Keynes, MK1 1DH, UK
Tel: +44 1908 366380

Germany

Synology GmbH
Grafenberger Allee 125
40237 Düsseldorf
Deutschland
Tel: +49 211 9666 9666