



RackStation **RS3614xs/RS3614RPxs**

Synology RackStation RS3614xs/RS3614RPxs provides the reliable and ultra-high performance network attached storage solution for large scale businesses that require an efficient way to centralize data protection, simplify data management, deploy virtualization solutions, and rapidly expand storage capacity with minimal time spent on setup and maintenance. Synology RS3614xs/RS3614RPxs is backed with Synology's 5-year limited warranty.

Highlights

- **Ultra-high performance of 3,518 MB/s throughput and 282,660 IOPS¹**
- **Scale up to 216TB with Synology RX1214/RX1214RP²**
- **Quad 10GbE support with Dual PCIe slots**
- **Expandable ECC RAM module (up to 32GB)**
- **SATA III 6Gb/s interface support**
- **SSD Cache Technology boosts throughput**
- **High Availability and Disaster Recovery solutions**
- **Backed with next business day replacement service³**
- **VMware®, Citrix®, and Microsoft® Hyper-V® certified**
- **Redundant Power Supply Unit (RS3614RPxs only)**
- **Running on Synology DiskStation Manager (DSM)**

Ultra-High Performance

RS3614xs/RS3614RPxs delivers ultra-high performance at **3,518 MB/s throughput** and **282,660 IOPS** under RAID 5 configuration with VLAN¹. Through advanced flash technology, the combination of hard drives and **read/write-optimized SSD cache** boosts throughput efficiently while minimizing cost per gigabyte. In addition, RS3614xs/RS3614RPxs comes with **native SATA III 6Gb/s support** that unleashes the full potential of blazing fast SSDs, ensuring the optimum data process under heavy system loading.

In addition to default 4 Gigabit ports, RS3614xs/RS3614RPxs comes with **dual PCI Express Gen3 x8 slots**, allowing installation of dual 10GbE Network Interface Cards (NIC) for maximized bandwidth, bringing you the superior performance that data-intensive applications demand of your storage system.

Equipped with 4GB RAM and **up to 32GB** ECC RAM expansion support, RS3614xs/RS3614RPxs ensures data accuracy as well as ultra-high performance to provide a rigorous foundation for the mission-critical tasks of your business.

Robust Scalability

With 12 HDD trays and up to **216TB** of total storage capacity², RS3614xs/RS3614RPxs is designed to grow with businesses and provides the ability to seamlessly expand a single volume up to 108TB on the fly.

RS3614xs/RS3614RPxs supports up to 36 HDDs or SSDs for flexible capacity and balanced performance to meet the needs of varying applications and processes. When the storage capacity of RS3614xs/RS3614RPxs nears its limit, expansion is easily accomplished with **Synology RX1214/RX1214RP** via specially-designed connection cables to maximize data transmission throughput between main server and expansion units.

Management of the large storage space on RS3614xs/RS3614RPxs is simple and flexible. Multiple Volumes on RAID allows users to create more than one volume on a RAID structure, providing a flexible and efficient way to manage the storage across all hard drives. When the need for more space arises, the volume could be easily expanded without any service disruption.

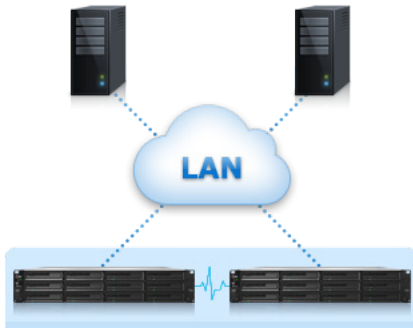


Figure 1) Reliability, Availability & Disaster Recovery

Synology High Availability ensures seamless transition between clustered servers in the event of server failure with minimal impact to businesses.

Comprehensive Business Applications

Powered by the innovative **Synology DiskStation Manager (DSM)**, RS3614xs/RS3614RPxs comes fully-equipped with applications and features designed specifically for large-scale business:

- Easy integration with existing business network environments through **Windows® AD** and **LDAP** directory services without recreating user accounts.
- **Windows ACL** support provides fine-grained access control and efficient privilege settings, allowing RS3614xs/RS3614RPxs to fit seamlessly into current infrastructure.
- Built-in backup applications protect information assets by regularly backing up files and **iSCSI LUNs** locally and remotely.
- Continuous data protection with **snapshots** of shared folders allows restoration of previous versions when the need arises.

Reliability, Availability & Disaster Recovery

System reliability is of paramount importance to businesses which depend upon their commercial servers every day. RS3614xs/RS3614RPxs responds to these concerns with wide-ranging availability and redundancy features:

- **Synology High Availability** ensures seamless transition between clustered servers in the event of server failure with minimal impact to applications.
- **Shared Folder Sync** replicates data in real-time to another Synology NAS at a remote location for prompt disaster recovery to meet the Recovery Time Objective (RTO) of your business
- **Redundant power supplies** (RS3614RPxs only), system fans, and network ports with failover support ensure continual service uptime.
- High reliability system design including **fan-less CPU heat-sink** and passive cooling technology prevents single point of failure.
- **ECC RAM modules** detect and correct errors during data transmission.
- Tool-free system fan design allows hot swap and easy exchange of malfunctioned system fans. With **Synology RKS1314** screwless rail kit sliding (optional), system installation and maintenance is fast and easy.

Unified Storage System


By integrating file-level (NAS) and block-level (SAN) storage into one unified storage system, RS3614xs/RS3614RPxs enables businesses to cost-effectively manage multi-protocol data and reduce total cost of ownership:

- Comprehensive network protocol support (**CIFS/SMB**, **AFP** and **NFS**) ensures seamless file sharing across Windows, Mac®, and Linux® platforms.
- Affordable and cost-effective iSCSI allows large scale business to consolidate storage into data center storage arrays.
- **Thin provisioning**, available for file-level iSCSI LUN, maximizes storage utilization by enabling administrators to oversubscribe provision and grow storage space as needed.

Virtualization Certified

RS3614xs/RS3614RPxs provides seamless storage solutions for virtualization environments, including **VMware**, **Citrix**, and **Hyper-V**. With **VMware vSphere 5** and **VAAI** integration certified, RS3614xs/RS3614RPxs helps offload specific storage operations and optimizes computation power for unparalleled performance and efficiency in VMware environments. As the centralized storage of a virtual environment, RS3614xs/RS3614RPxs enables virtual machine migration, allowing movement from server to server whilst eliminating service downtime and disruption to user. **Windows Offloaded Data Transfer (ODX)** and **Synology Advanced LUN** support extremely improves the efficiency on massive data transfer and migration.

Connections & Buttons

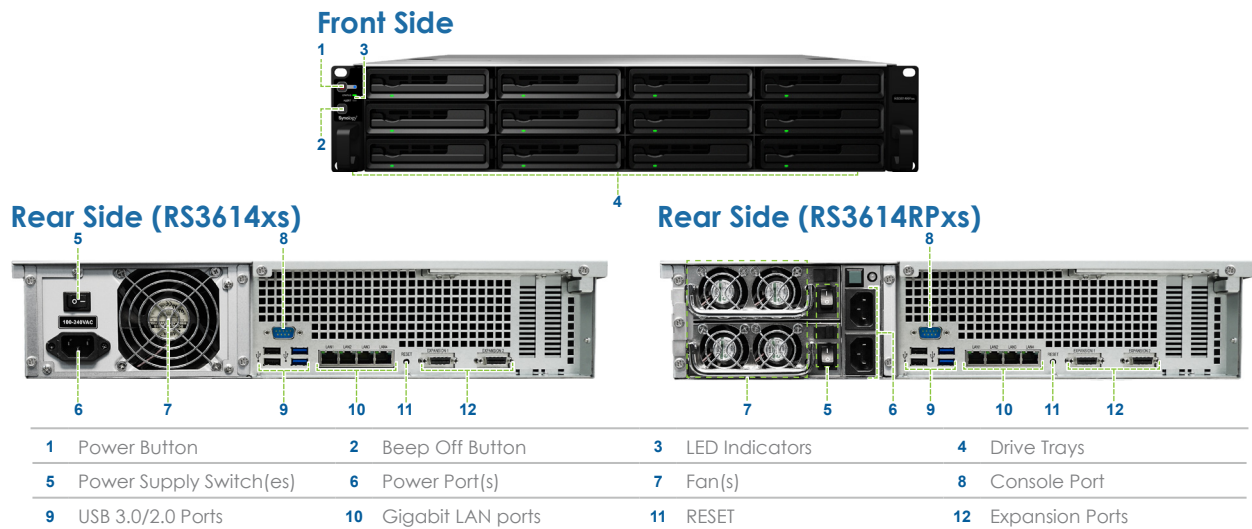

Technical Specifications

Hardware

CPU	Intel Core i3 Dual Core 3.4GHz
Hardware Encryption Engine	Yes
Floating Point	Yes
Memory	4GB DDR3 ECC RAM (Expandable, up to 32GB)
Internal HDD/SSD	3.5" or 2.5" SATA(III) / SATA(II) X 12 (hard drives not included)
Max Internal Capacity	72TB (12 X 6TB HDD) (The actual capacity will differ according to volume types)
External Ports	USB 3.0 X 2, USB 2.0 X 2, Expansion Port X 2
Size (HxWxD) (mm)	88 X 445 X 570
Weight	13.3 Kg (RS3614xs) / 15.4 Kg (RS3614RPxs)
LAN	Gigabit X 4 (supports 2 X optional dual-port 10GbE add-on card)
Wake on LAN/WAN	Yes
Wireless Support (dongle)	Yes
AC Input Power Voltage	100V to 240V AC
Power Frequency	50 / 60Hz, Single Phase
Operating Temperature	5°C to 35°C (40°F to 95°F)
Storage Temperature	-20°C to 60°C (-5 to 140°F)
Relative Humidity	5% to 95% RH

General

Networking Protocols	CIFS, AFP, NFS, FTP, WebDAV, CalDAV, iSCSI, Telnet, SSH, SNMP, VPN (PPTP, OpenVPN™, L2TP)
File System	Internal: EXT4 External: EXT4, EXT3, FAT, NTFS, HFS+
Storage Management	Max File System Size: 108TB, Max Internal Volume #: 1024, Max iSCSI Target #: 64, Max iSCSI LUN#: 512, RAID Clone/Snapshot support; Supported RAID Type : Synology Hybrid RAID, Basic, JBOD, RAID 0, RAID 1, RAID 5, RAID 6, RAID 10; Synology Expansion Unit Support: RX1214 & RX1214RP
File Sharing Capability	Max User Account: 16000, Max Group: 512, Max Shared Folder: 512, Max Concurrent CIFS/AFP/FTP Connections : 1024
Privilege	Windows Access Control List (ACL)
Virtualization	VMware vSphere 5, Microsoft Hyper-V, Citrix Certified
Directory Service	Windows AD Integration: Domain Users login via Samba (CIFS)/AFP/FTP/File Station, LDAP Integration
Security	FTP over SSL/TLS, IP Auto-Block, Firewall, Encrypted Network Backup over Rsync, HTTPS Connection
Utilities	Synology Assistant, Synology Data Replicator 3
Supported Clients	Windows XP onward, Mac OS X® 10.5 onward, Ubuntu 9.04 onward
Supported Browsers	Chrome®, Firefox® Internet Explorer®: 8 or later, Safari® 5 or later, Safari (iOS 5 or later on iPad®), Chrome (Android™ 4.0 on tablets)
Language	English, Deutsch, Français, Italiano, Español, Dansk, Norsk, Svensk, Nederlands, Русский, Polski, Magyar, Português do Brasil, Português Europeu, Türkçe, Český, 日本語, 한국어, 繁體中文, 简体中文

Applications

File Station	Virtual Drive, Remote Folder
Backup Solutions	Network Backup, Local Backup, Desktop Backup (Window: Synology Data Replicator; Mac: Apple® Time Machine® backup application); Shared Folder Sync - Max Task Number : 16, Configuration Backup
Mail Server	Supported Mail Server Protocols: POP3, SMTP, IMAP
FTP Server	Bandwidth Control, Custom FTP Passive Port Range, Anonymous FTP, Transfer Log
Web Station	Virtual Host (up to 30 websites), PHP/MySQL®, 3rd-Party Applications Support
Printer Server	Max Printer #: 2, Printing Protocols: LPR, CIFS, IPP, Apple iOS Printing, Google Cloud Print™, Multi Functional Print Server (MFP functions are for Windows PC only)
Log Center	SSL Connection, Log Rotation: 6 months, 1 year, 2 years, 3 years, Email Notification
iOS/Android Applications	DS audio, DS cam, DS cloud, DS download, DS file, DS finder, DS photo+, DS video
Windows Phone Applications	DS audio, DS finder, DS photo+, DS video, DS file

Add-on Packages

Surveillance Station	Default IP cam #: 2, MAX IP cam # (licenses required): 75 (with two free licenses to install two IP cameras. Additional licenses can be purchased to expand the license quota.)
VPN Server	Maximum Connections: 30, VPN Method: PPTP, OpenVPN, L2TP
Mail Station	Webmail Interface for Mail Server, Receiving Mails from Multiple POP3 Mailboxes, Customizable SMTP Server
Antivirus Essential	Full System Scan, Scheduled Scan, White List Customization, Virus Definition Auto Update
Time Backup	Maximum Task Number: 16, Multiple File Versions Retained, Instant File Restoration
Cloud Station	Maximum Concurrent File Transfers: 1024, Retain Historical and Deleted File Versions
Download Station	Supported Download Protocols: BT/HTTP/FTP/NZB/eMule Maximum Concurrent Download Tasks : 80
Other Packages	Photo Station, Audio Station, iTunes® Server, 3rd-party packages

Environment and Packaging

Environment	RoHS Compliant
Package Content	RS3614xs/RS3614RPxs Main Unit, Welcome Note, Accessory Pack, AC Power Cord X 1 (RS3614xs), AC Power Cord X 2 (RS3614RPxs)
Optional Accessories	Remote, Camera License Pack, Synology RKS1314 - Rail Kit Sliding, 4GB and 8GB ECC RAM Module, Expansion Unit (RX1214/RX1214RP X 2)
Warranty	5 years

*Model specifications are subject to change without notice. Please refer to www.synology.com for the latest information.

1. Tested with 4 X 10 GbE connections using VLAN and fully loaded with Intel 520 Series 240GB 2.5" SSD. Performance may vary depending on the environment.
2. RS3614xs/RS3614RPxs supports up to two Synology RX1214/RX1214RP, purchased separately.
3. Available in selected countries only. For detailed terms and conditions, please visit the Synology Replacement Service (SRS) website at <https://srs.synology.com>.

SYNOLOGY INC.

Synology is dedicated to taking full advantage of the latest technologies to bring businesses and home users reliable and affordable ways to centralize data storage, simplify data backup, share and sync files across different platforms, and access data on-the-go. Synology aims to deliver products with forward-thinking features and the best in class customer services.

Copyright © 2014, Synology Inc. All rights reserved. Synology, the Synology logo are trademarks or registered trademarks of Synology Inc. Other product and company names mentioned herein may be trademarks of their respective companies. Synology may make changes to specification and product descriptions at anytime, without notice. Printed in Taiwan.

RS3614xs/RS3614RPxs-2014-ENU-REV002

Headquarters

Synology Inc.
3F-3, No. 106, Chang An W. Rd.,
Taipei, Taiwan
Tel: +886 2 2552 1814
Fax: +886 2 2552 1824

France

Synology France SARL
39 rue Louis Blanc,
92400 Courbevoie
France
Tel: +33 147 176288

North & South America

Synology America Corp.
13343 NE Bel-Red Road,
Bellevue, WA 98005
USA
Tel: +1 425 818 1587

United Kingdom

Synology UK Ltd.
Unit C, Denbigh West Business Park,
Third Avenue, Bletchley,
Milton Keynes, MK1 1DH, UK
Tel: +44 1908 366380

Germany

Synology GmbH
Grafenberger Allee 125
40237 Düsseldorf
Deutschland
Tel: +49 211 9666 9666